



FC/PC CONNECTOR WITH  
KNURLED LOCKING NUT  
SPRING LOADED CERAMIC FERRULE  
126µm +1/-0µm


NARROW KEY (2.0mm)

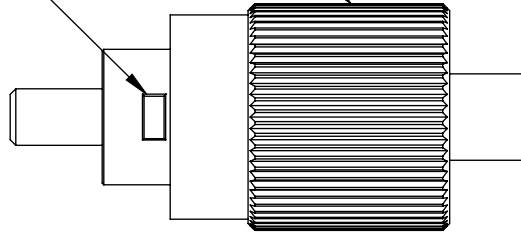


STRAIN RELIEF BOOT USED WITH  
900µm FURCATION TUBING

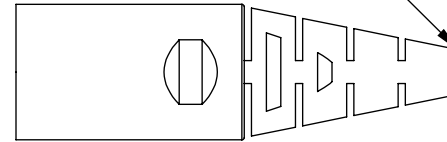

EXPLODED VIEW



ISOMETRIC VIEW  
SCALE 1:1

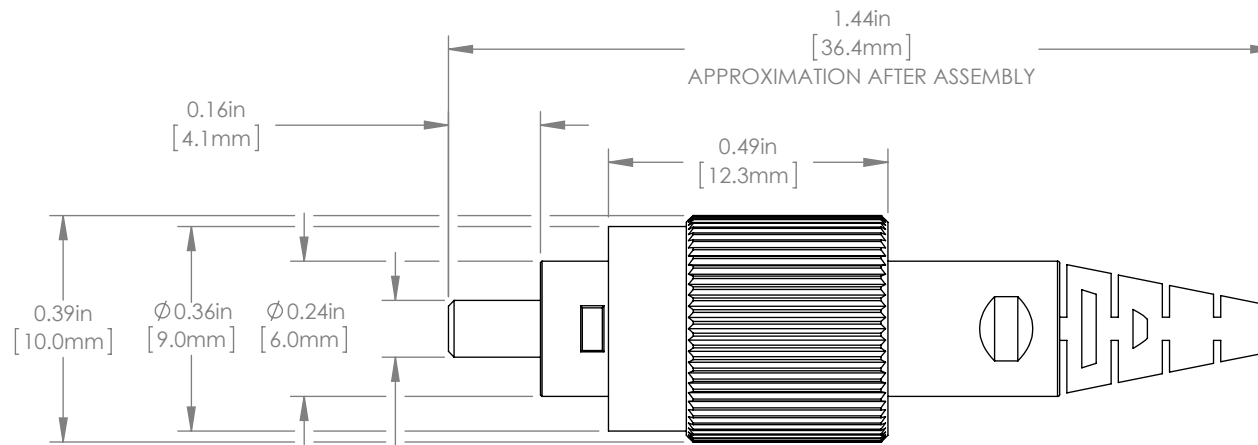

ASSEMBLED VIEW

INCLUDED BUT NOT SHOWN  
• PROTECTIVE DUST CAP

Ø0.10in  
[2.5mm]

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION				<b>THORLABS</b> www.thorlabs.com	
NAME	DATE	SINGLEMODE, FC/PC CONNECTOR, Ø126µm, 900µm BOOT			
DRAWN	JW	01/DEC/12	MATERIAL		REV
APPROVAL	KH	27/DEC/12	N/A		A
COPYRIGHT © 2012 BY THORLABS					
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS		ITEM #	APPROX WEIGHT		
		30126C9	0.05kg		