


ISOMETRIC VIEW  
SCALE 1:1


FC/PC CONNECTOR WITH  
KNURLED LOCKING NUT  
SPRING LOADED CERAMIC FERRULE

NARROW KEY 2.0mm

450 $\mu$ m +10/-0  $\mu$ m


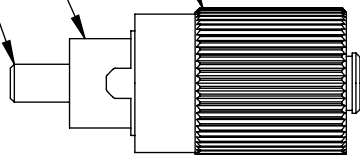


CRIMP SLEEVE



EXPLODED VIEW

STRAIN RELIEF BOOT USED WITH  
3.0mm FURCATION TUBING

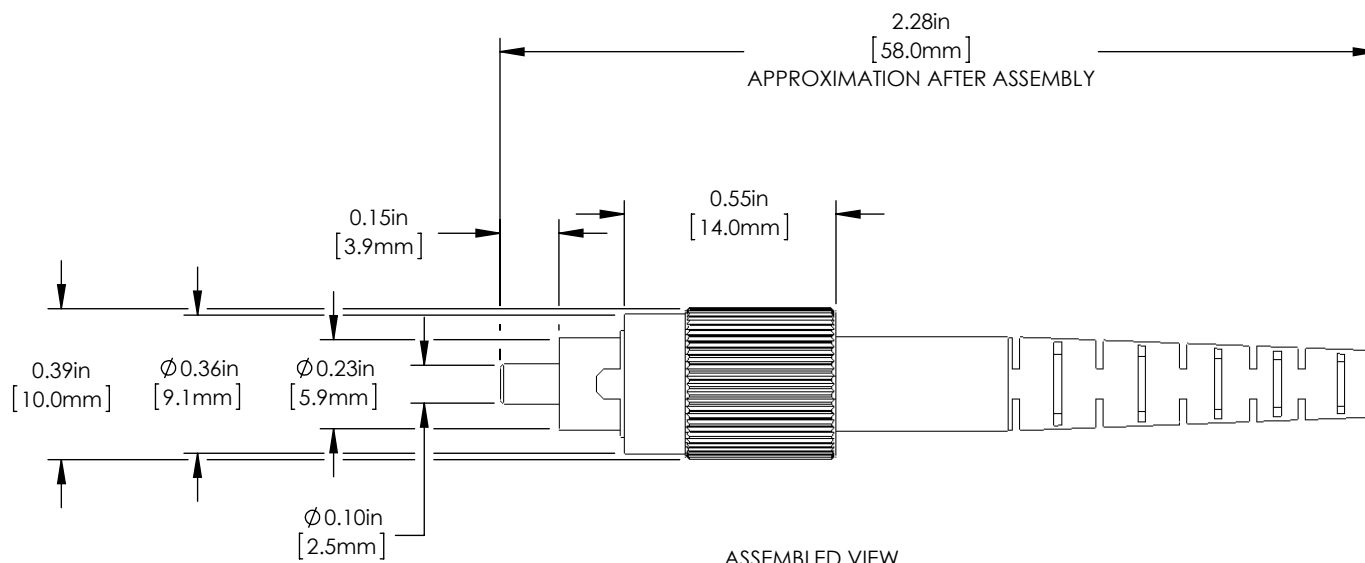

INCLUDED BUT NOT SHOWN  
 • PROTECTIVE DUST CAP  
 • REMOVABLE 0.5" [13.0 mm] TEFLON GUIDE USED FOR INSERTION OF FIBER AND EPOXY SYRINGE

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION



	NAME	DATE
DRAWN	IR	23/MAR/16
APPROVAL	PH	20/APR/16

COPYRIGHT © 2016 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS

**THORLABS**

www.thorlabs.com  
MULTIMODE, FC/PC  
CONNECTOR,  $\Phi$ 450 $\mu$ m

MATERIAL	REV
N/A	A
ITEM #	APPROX WEIGHT
30450C1	0.05kg